

Maria Parrish Tungol
Patent Attorney
Member Illinois & Virginia Bars

1825 Eye Street, N.W.
Suite 400
Washington, D.C. 20006
Telephone: (202) 429 5249

~~10/512784~~
DT07 Rec'd PCT/PTO 26 OCT 2004
10/511 394
Rec'd PCT/PTO 26 OCT 2004
Central Telefax: (610) 667-8787
E-mail: patents@tungol.us

USPTO Location:
5820 Fifer Drive
Suite 100
Alexandria, VA 22303

October 26, 2004

Commissioner of Patents
Alexandria, VA 22313

Attorney Docket No. DKC 1560

**RE: New Patent Application under 35 U.S.C. §371
based on PCT Application PCT/KR03/00749**

Enclosed herewith are the application papers for a patent in the name(s) of Sung Hee Ahn, Jae Ho Yang, Young Gil Jang, and Su Hak Bae entitled: "THERMOPLASTIC FLAME RETARDANT RESIN COMPOSITION".

Enclosed are:

Published PCT Application No. PCT/KR03/00749 (WO 03/089513 A1)
International Search Report
International Preliminary Examination Report
Form PCT/IB/308
Declaration and Application Data Sheet Form
Credit Card Payment Form for Filing Fee
Assignment
Recordation Cover Sheet
Credit Card Payment Form for Recordation of Assignment

Filing Fee Calculation:

		Number Filed	Number extra		
Basic Filing Fee					\$ 1100
Total Claims:		- 20		x \$18	0
Independent claims:	2	- 3		x \$88	0
Multiple dependent claims:				\$300	0
SUBTRACT ONE-HALF FOR SMALL ENTITY					0
TOTAL FILING FEE					\$ 1100

10/512784


DT15 Rec'd PCT/PTO 26 OCT 2004

Transmittal Letter for Patent Application for Ahn
October 26, 2004

Applicants claim the right of priority under 35 U.S.C. §119 to Republic of Korea Patent Application No. 10-2002-0020639 filed on April 16, 2002. A certified copy was submitted in the International Application.

A prompt and favorable action on the merits is respectfully requested.

Respectfully submitted,



Maria Parrish Tungol
(Reg. No. 31,720)
Telephone No. (571) 275 1111

10/511 394

Rec'd PCT/PTO 26 OCT 2004

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
30 October 2003 (30.10.2003)

PCT

(10) International Publication Number
WO 03/089513 A1

- (51) International Patent Classification⁷: C08L 25/06, 71/02, 55/02, C08K 5/521, C08L 25/10
Hyundai Apt. 101-810, Seongsu2-dong, Seongdong-gu, Seoul 133-112 (KR).
- (21) International Application Number: PCT/KR03/00749
(74) Agent: CHOI, Duk Kyu; 5th Floor Chunwoo Bldg., 736 Yoksam-dong, Gangnam-gu, Seoul 135-080 (KR).
- (22) International Filing Date: 14 April 2003 (14.04.2003)
(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GI, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SI, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: Korean
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (26) Publication Language: English
- (30) Priority Data: 10-2002-0020639 16 April 2002 (16.04.2002) KR
- (71) Applicant (*for all designated States except US*): CHEIL INDUSTRIES INC. [KR/KR]; 290 Gongdan-dong, Gumi-si, Gyeongsangbuk-do 730-710 (KR).
- (72) Inventors; and
(75) Inventors/Applicants (*for US only*): AHN, Sung Hee [KR/KR]; 102-503 Kumho-bestville, 1052 Sangwangsimni-dong, Seongdong-gu, Seoul 133-010 (KR). YANG, Jae Ho [KR/KR]; 981-1205 Bakdu Apt., 1119 Sanbon-dong, Euiwang-si, Gyeonggi-do 435-040 (KR). JANG, Young Gil [KR/KR]; 141-94 Sadang3-dong, Dongjak-gu, Seoul 156-093 (KR). BAE, Su Hak [KR/KR];
- Published:
with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



WO 03/089513 A1

(54) Title: THERMOPLASTIC FLAME RETARDANT RESIN COMPOSITIONS

(57) Abstract: A thermoplastic flame retardant resin composition according to the present invention comprises: (A) about 40-95 parts by weight of a styrenic resin; (B) about 5-60 parts by weight of a polyphenylene ether; (C) about 0.1-40 parts by weight of a rubber modified polystyrene resin containing about 40-65 % by weight of a rubber and about 0.1-8 % by weight of acrylonitrile based on 100 parts by weight of the sum of (A) and (B); and (D) about 5 to 30 parts by weight of an aromatic phosphoric acid ester compound based on 100 parts by weight of the sum of (A) and (B).

THERMOPLASTIC FLAME RETARDANT RESIN COMPOSITIONS

Field of the Invention

5

The present invention relates to a thermoplastic flame retardant resin composition. More particularly, the present invention relates to a thermoplastic flame retardant resin that comprises a styrenic resin and polyphenylene ether as a base resin, a rubber modified polystyrene resin containing 0.1-8 % by weight of acrylonitrile in the polystyrene resin excluding rubber, and an aromatic phosphoric acid ester as a flame retardant.

10

Background of the Invention

15

Polyphenylene ether resin has good thermal resistance, high impact strength, and good dimensional stability. Accordingly, the resin has been widely applied for common uses. However, the disadvantage could be observed that the polyphenylene ether resin has poor processability due to its excessively high thermal resistance. For this reason, the polyphenylene ether resin is blended with a rubber-modified styrenic resin or a styrenic resin to improve processability for use of electronic appliances such as personal computers, facsimiles, and the like. Further, in case that a blend of a polyphenylene ether and a rubber modified styrene-containing resin is applied to the fields of electric or electronic goods, flame-retardant property should be given to the resin.

20

25

A widely known method for giving the flame retardant property is that a halogen-containing compound or an antimony-containing compound is added to a rubber modified styrene-containing resin. However, the disadvantages could be observed that the halogen-containing compound results in the corrosion of the mold itself by the hydrogen halide gases released during the molding process and is fatally harmful due to the toxic gases liberated in case of fire.

30

Especially, since polybromodiphenyl ether, mainly used for a halogen containing flame retardant, can produce toxic gases such as dioxin or furan during combustion, flame-retardants that are prepared without a halogen-containing compound have become a major concern in this field.

5 It is commonly a known method to apply a phosphorus or nitrogen compound as halogen-free flame retardant to a resin composition. However, usage of only a phosphorus compound deteriorates heat resistance of a rubber modified styrene-containing resin and does not impart sufficient flame retardant property.

Generally, when a rubber modified styrene-containing resin such as ABS is
10 burned; a char is not produced due to decomposition and vaporization in most parts (*Journal of Applied Polymer Science*, 1998, vol 68, p1067). Therefore, to impart an effect of flame retardancy, it is necessary to add a char-forming agent such as polycarbonate or polyphenylene ether resin to a resin composition, which plays a role in prohibiting entrance of oxygen and emission of fuel by forming char on the
15 surface of rubber with three-dimensional carbon bonds under combustion.

Aromatic phosphoric ether is commonly used to give the flame retardancy to the blend.

Japanese Patent Laid-open No. 7-48491 discloses a flameproof thermoplastic resin, made of adding a novolac phenolic resin as a char-forming
20 agent and a phosphoric acid ester as a flame retardant into a thermoplastic copolymer resin composed of a rubber copolymer and an aromatic vinyl monomer. It was found that in order to obtain a good property of flame retardancy, a phenolic resin as a char-forming agent and a phosphoric acid ester compound as a flame retardant should be added in a lot of amount. However, in
25 this case, the heat resistance of the resin composition is dropped suddenly.

In a blend of a polyphenylene ether and a rubber modified styrene-containing resin, the more the rubber modified styrene-containing resin is used, the lower the flame retardancy of the resin composition is getting. Thus, flame retardancy is almost lost when the rubber modified polystyrene is added more
30 than the critical amount. If the amount of acrylonitrile-butadiene-styrene copolymer

or rubber modified polystyrene resin is increased in the blend of a polyphenylene ether and a rubber modified styrene-containing resin, a great amount of decomposition is produced from combustion, so that a char film is destroyed to decrease flame retardancy of the resin.

5 U.S. patent No. 3,639,506 discloses a resin composition using triphenyl phosphate (TPP) and a halogen-containing compound together as flame retardants for giving flame retardancy to a polyphenylene ether resin and a styrenic resin. U.S. patent No. 3,883,613 discloses a resin composition using trimesityl phosphate as a flame retardant to a polyphenylene ether resin and a styrenic resin. U.S. patent No. 10 4,526,917 discloses a resin composition using TPP and trimesityl phosphate as flame retardants.

Accordingly, the present inventors have developed a thermoplastic flame retardant resin composition which has a good appearance, flame-retardancy, and impact strength by adding acrylonitrile-rubber-styrene copolymer containing 0.1 to 15 8 % by weight of acrylonitrile in the polystyrene resin excluding rubber to a blend of a rubber modified polystyrene resin and polyphenylene ether resin.

Objects of the Invention

20 An object of the present invention is to provide a thermoplastic resin composition with good flame retardancy.

Another object of the present invention is to provide a thermoplastic flame retardant resin composition with good appearance and gloss.

A further object of the present invention is to provide a thermoplastic flame 25 retardant resin composition with good impact strength.

A further object of the present invention is to provide a thermoplastic flame retardant resin composition with good molding property.

Other objects and advantages of this invention will be apparent from the ensuing disclosure and appended claims.

30

Summary of the Invention

A thermoplastic flame retardant resin composition according to the present invention comprises (A) about 40 to 95 parts by weight of a styrenic resin; (B) about 5 to 60 parts by weight of a polyphenylene ether; (C) about 0.1 to 40 parts by weight of a rubber modified polystyrene resin containing about 40 to 65 % by weight of a rubber and about 0.1 to 8 % by weight of acrylonitrile in the polystyrene resin excluding rubber based on 100 parts by weight of the sum of (A) and (B); and (D) 5 to 30 parts by weight of an aromatic phosphoric acid ester compound based on 100 parts by weight of the sum of (A) and (B).

The detailed descriptions of components of the resin composition according to the present invention are as follows:

Detailed Description of the Invention

(A) Styrenic Resin

The styrenic resin of the present invention is prepared by a known method such as bulk polymerization, suspension polymerization, emulsion polymerization, or a combination thereof. In the present invention, polystyrene resin without rubber and rubber modified polystyrene resin can be used alone or in combination as a mixture.

The rubber modified polystyrene resin can be produced by thermal polymerization without an initiator, or in the presence of initiator such as benzoyl peroxide, t-butyl hydroperoxide, acetyl peroxide, cumen hydroperoxide, etc, by adding 80 to 99.5 parts by weight of one or more monomer(s) selected from a group consisting of styrene, *N*-substituted styrene and α -alkyl styrene to 0.5 to 20 parts by weight of a rubber selected from the group consisting of butadiene, isoprene, copolymer of butadiene and styrene, and alkyl acrylate.

The polystyrene resin without rubber can be prepared by thermal polymerization without an initiator, or in the presence of an initiator such as benzoyl peroxide, t-butyl hydroperoxide, acetyl peroxide, or cumen hydroperoxide, by polymerizing one or more monomer(s) selected from the group consisting of styrene,
5 *N*-substituted styrene and α -alkyl styrene.

Preferably, the styrenic resin of the present invention is used in an amount of about 40 to 95 parts by weight, and more preferably 50 to 90 parts by weight.

(B) Polyphenylene Ether Resin

10

The Polyphenylene ether resin is employed as a base resin to improve flame retardancy, heat resistance and rigidity of the resin composition according to the present invention. As examples of the polyphenylene ether resin, poly(2,6-dimethyl-1,4-phenylene) ether, poly(2,6-diethyl-1,4-phenylene) ether,
15 poly(2,6-dipropyl-1,4-phenylene) ether, poly(2-methyl-6-ethyl-1,4-phenylene) ether, poly(2-methyl-6-propyl-1,4-phenyl) ether, poly(2-ethyl-6-propyl-1,4-phenylene) ether, poly(2,6-diphenyl-1,4-phenylene) ether, copolymer of poly(2,6-dimethyl-1,4-phenylene) ether and poly(2,3,6-trimethyl-1,4-phenylene) ether, and copolymer of poly(2,6-dimethyl-1,4-phenylene) ether and
20 poly(2,3,5-triethyl-1,4-phenylene) ether can be used.

Preferably, copolymer of poly(2,6-dimethyl-1,4-phenylene) ether and poly(2,3,6-trimethyl-1,4-phenylene) ether, and poly(2,6-dimethyl-1,4-phenylene) ether are preferably used, more preferably poly(2,6-dimethyl-1,4-phenylene) ether is used.

25 The degree of polymerization of polyphenylene ether is not limited specifically, but considering heat-stability or processability of the resin composition, it is preferable that the intrinsic viscosity of polyphenylene ether is in the range of from 0.2 to 0.8 when measured in a chloroform solvent at 25 °C.

The polyphenylene ether resin in this invention is preferably used in an

amount of 5 to 60 parts by weight, more preferably 10 to 50 parts by weight.

(C) Rubber modified polystyrene resin containing about 0.1 to 8 % by weight of acrylonitrile in the polystyrene resin excluding rubber

5

The rubber modified polystyrene resin according to the present invention is a graft copolymer wherein rubber phase polymers are dispersed in the form of particles in a matrix obtained by graft-polymerizing monomer mixture onto rubber phase polymer. The rubber modified polystyrene resin is prepared by mixing an aromatic vinyl monomer and a vinyl group-containing monomer, which can be copolymerized therewith, in the presence of a rubbery phase polymer.

Such rubber-modified styrenic resin is prepared by a known method such as emulsion polymerization, suspension polymerization or bulk polymerization. In bulk polymerization, the grafted copolymer can be produced in one process. The content of rubber in the final rubber modified polystyrene resin to the total weight of a graft copolymer resin is preferably in 40 to 65 % by weight. The examples of such resins are acrylonitrile-butadiene-styrene (ABS) copolymer resin, acrylonitrile-acryl rubber-styrene (AAS) copolymer resin, acrylonitrile-ethylenepropylene rubber-styrene copolymer resin, and so on.

The examples of the rubber for rubber-modified styrenic resin are diene rubbers such as polybutadiene, poly(styrene-butadiene), poly(acrylonitrile-butadiene), etc; a saturated rubber in which hydrogen is added to said diene-containing rubber; isoprene rubber; chloroprene rubber; a polyacrylic acid butyl; and a terpolymer of ethylene-propylene-diene (EPDM). It is preferable to use a diene-containing rubber, more preferably a butadiene-containing rubber. The content of rubber is preferably in the range of 40 to 65 % by weight based on the total weight of a graft copolymer resin.

The examples of the aromatic vinyl monomer are styrene, α -methyl styrene,

p-methyl styrene, etc. In the above examples, styrene is the most preferable.

The examples of the vinyl group-containing monomer copolymerizable with aromatic vinyl monomer are cyanide vinyl group-containing compounds such as acrylonitrile and unsaturated nitrile-containing compounds such as methacrylonitrile.

In the present invention, the rubber modified polystyrene resin is composed of 40 to 65 % by weight of rubber and 60 to 35 % by weight of monomer mixture. The monomer mixture contains 92 to 99.9 % by weight of aromatic vinyl monomer such as styrene and 0.1 to 8 % by weight of unsaturated nitrile monomer. It is preferable that the monomer mixture contains 95 to 99.9 % by weight of aromatic vinyl monomer and 0.1 to 5 % by weight of unsaturated nitrile monomer.


In addition, in order to give good characteristics of processability and heat resistance, the monomers such as acrylic acid, methacryl acid, maleic anhydride and N-substituted maleimide can be added in the graft polymerization. The amounts of the monomers are less than 40 parts by weight based on 100 parts by weight of the graft copolymer resin.

To acquire good impact strength and appearance when said styrene-containing graft copolymer is prepared, the average size of rubber particles is preferably in the range of from 0.1 to 0.4 μm .

The content of the rubber modified polystyrene resin in the present invention is preferably 0.1 to 40 parts by weight per 100 parts by weight of the base resin. It is more preferable that the content of the rubber modified polystyrene resin is more preferably 10 to 40 parts by weight per 100 parts by weight of the base resin

(D) Phosphoric acid ester compound

The phosphoric acid ester compound used in the present invention is a compound having the following structural formula (I):

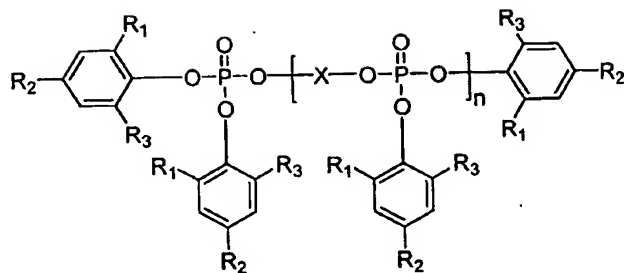

(I)

wherein R_1 , R_2 and R_3 independently of one another are hydrogen or C_{1-4} alkyl; X is a C_{6-20} aryl group or alkyl-substituted C_{6-20} aryl group that are derivatives from a dialcohol derivative such as resorcinol, hydroquinol, bisphenol-A and bisphenol-S; and n is 0~4.

Where n is 0, the compound represented in the structural formula (I) is triphenyl phosphate, tricresyl phosphate, trixylenyl phosphate, tri(2,6-dimethyl phenyl) phosphate, tri(2,4,6-trimethyl phenyl) phosphate, tri(2,4-ditertiary butyl phenyl) phosphate, tri(2,6-ditertiary butyl phenyl) phosphate, and the like, and where N is 1, the compounds include resorcinolbis(diphenyl) phosphate, resorcinolbis(2,6-dimethyl phenyl) phosphate, resorcinolbis(2,4-ditertiary butyl phenyl) phosphate, hydroquinolbis(2,6-dimethyl phenyl) phosphate, hydroquinolbis(2,4-ditertiary butyl phenyl) phosphate, and the like. The compounds can be used alone or in combination therewith.

In the present invention, the phosphoric acid ester compound as a flame retardant is used in the amount of 5 to 30 parts by weight per 100 parts by weight of the base resin (A)+(B).

Other additives may be contained in the resin composition of the present invention. The additives include an anti-dripping agent, an impact modifier, inorganic filler, a heat stabilizer, an anti-oxidant, a light stabilizer, a pigment, and/or dye. Inorganic filler is such as talc, silica, glass fiber, ceramics, a

carbonate, and a sulphate. The additives are employed in the amount of 0 to 50 parts by weight on the basis of 100 parts by weight of the base resin.

The invention may be better understood by reference to the following examples that are intended for the purpose of illustration and are not to be construed as in any way limiting the scope of the present invention, which is defined in the claims appended hereto. In the following examples, all parts and percentage are by weight unless otherwise indicated.

10 Examples

The components to prepare flameproof thermoplastic resin compositions in Examples 1-5 and Comparative Examples 1-5 are as follows:

15 (A) Styrenic resin

(A₁) polystyrene (GPPS)

GPPS by Cheil Industry Co. of Korea (product name: HF-2680) was used.

20

(A₂) rubber modified styrene-containing resin (HIPS)

Rubber modified polystyrene resin by Cheil Industry Co. of Korea (product name: HG-1760S) was used.

25 (B) Polyphenylene Ether (PPE)

Poly(2,6-dimethyl-phenyl ether) by Asahi Kasei Co. of Japan (product name: P-402) was used.

30 (C) Rubber modified polystyrene resin

(C₁) Rubber modified polystyrene resin

50 parts of butadiene rubber latex powder, 48.5 parts of styrene, 1.5 parts of acrylonitrile, and 150 parts of deionized water were blended. To the blend, 1.0 parts of potassium oleate, 0.4 parts of cumenhydroperoxide, 0.2 parts of mercaptan-containing chain transfer agent, 0.4 parts of glucose, 0.01 parts of ferrous sulfate hydrate, and 0.3 parts of sodium pyrophosphate were added. The blend was kept at 75 °C for 5 hours to obtain g-ABS latex. To the g-ABS latex, 0.4 parts of sulfuric acid was added, coagulated and dried to obtain rubber modified polystyrene resin (g-ABS) in a powder form.

10

(C₂) Rubber modified polystyrene resin

50 parts of butadiene rubber latex powder, 47.5 parts of styrene, 2.5 parts of acrylonitrile, and 150 parts of deionized water were blended. To the blend, 1.0 parts of potassium oleate, 0.4 parts of cumenhydroperoxide, 0.2 parts of mercaptan-containing chain transfer agent, 0.4 parts of glucose, 0.01 parts of ferrous sulfate hydrate, and 0.3 parts of sodium pyrophosphate were added. The blend was kept at 75 °C for 5 hours to obtain g-ABS latex. To the g-ABS latex, 0.4 parts of sulfuric acid was added, coagulated and dried to obtain rubber modified polystyrene resin (g-ABS) in a powder form.

20

(C₃) Rubber modified polystyrene resin

50 parts of butadiene rubber latex powder, 46.5 parts of styrene, 3.5 parts of acrylonitrile, and 150 parts of deionized water were blended. To the blend, 1.0 parts of potassium oleate, 0.4 parts of cumenhydroperoxide, 0.2 parts of mercaptan-containing chain transfer agent, 0.4 parts of glucose, 0.01 parts of ferrous sulfate hydrate, and 0.3 parts of sodium pyrophosphate were added. The blend was kept at 75 °C for 5 hours to obtain g-ABS latex. To the g-ABS latex, 0.4 parts of sulfuric acid was added, coagulated and dried to obtain rubber modified polystyrene resin (g-ABS) in a powder form.

25

(D) Phosphoric acid ester compound

Triphenylphosphate(TPP) with a melting point of 48°C was used.

5 (E) Rubber modified polystyrene resin (ABS resin)

(E₁) Acrylonitrile-Butadiene-Styrene Copolymer Resin (g-ABS resin)

50 parts of butadiene rubber latex powder, 36 parts of styrene, 14 parts of acrylonitrile, and 150 parts of deionized water were blended. To the blend,
10 1.0 parts of potassium oleate, 0.4 parts of cumenhydroperoxide, 0.2 parts of mercaptan-containing chain transfer agent, 0.4 parts of glucose, 0.01 parts of ferrous sulfate hydrate, and 0.3 parts of sodium pyrophosphate were added. The blend was kept at 75 °C for 5 hours to obtain g-ABS latex. To the g-ABS latex, 0.4 parts of sulfuric acid was added, coagulated and dried to obtain
15 acrylonitrile-butadiene-styrene graft copolymer resin (g-ABS) in a powder form.

(E₂) Butadiene-Styrene Resin (g-BS resin)

50 parts of butadiene rubber latex powder, 50 parts of styrene and 150 parts of deionized water were blended. To the blend, 1.0 parts of potassium
20 oleate, 0.4 parts of cumenhydroperoxide, 0.2 parts of mercaptan-containing chain transfer agent, 0.4 parts of glucose, 0.01 parts of ferrous sulfate hydrate, and 0.3 parts of sodium pyrophosphate were added. The blend was kept at 75 °C for 5 hours to obtain g-ABS latex. To the g-ABS latex, 0.4 parts of sulfuric acid was added, coagulated and dried to obtain butadiene-styrene graft copolymer resin
25 (g-BS) in a powder form.

Examples 1~5

The components as shown in Table 1 were blended and extruded in the

form of pellets with a twin-screw extruder at 200~280 °C. The pellets were dried at 80 °C for 3 hours and extruded into test specimens in a 6 oz. extruder at molding temperature of 220~280 °C and barrel temperature of 40~80 °C, and the resin pellets were molded into test specimens.

5

Comparative Examples 1~5

The Comparative Examples 1 was conducted in the same manner as in Example 4, except that the rubber modified polystyrene resin (C₁) was not used.

10 The Comparative Examples 2 was conducted in the same manner as in Example 5, except that the rubber modified polystyrene resin (C₁) was not used.

The Comparative Examples 3 was conducted in the same manner as in Example 1, except that the rubber modified polystyrene resin (C₁) was not used.

15 The Comparative Examples 4 was conducted in the same manner as in Comparative Examples 3, except that g-ABS resin (E₁) was used.

The Comparative Examples 5 was conducted in the same manner as in Comparative Examples 3, except that g-BS resin (E₂) was used.

Measurement of Physical Properties:

20

(1) Flame retardancy

The flame retardancy was measured in accordance with UL94VB with a thickness of 1/10" and 1/12".

25

(2) Impact strength

Impact strength was measured according to Izod impact strength ASTM D-256 (1/8" notched).

(3) Vicat softening temperature (VST)

Vicat softening temperature was measured in accordance with ASTM D-1525 under load of 1 kg.

(4) Melt flow index

- 5 Melt flow index (g/10min) was measured in accordance with ASTM D-1238 at 220°C and 10 kg load.

(5) Appearance

- 10 Appearance was evaluated by use of a score of test specimens prepared by injecting pellets at 200°C~280°C with a 65 degrees viewing angle. The pellets was prepared from a rectangular plate mold of 50mm × 200mm × 2mm with a gate having a diameter of 2 mm which was 30 mm away from a central portion of one of the ends thereof.

15

Table 1

		Examples					Comparative Examples				
		1	2	3	4	5	1	2	3	4	5
(A)	(A ₁) GPPS	35	35	35	70	-	70	-	35	35	35
	(A ₂) HIPS	35	35	35	-	70	-	70	35	35	35
(B) PPE resin		30	30	30	30	30	30	30	30	30	30
(C)	(C ₁)	20	-	-	20	20	-	-	-	-	-
	(C ₂)	-	20	-	-	-	-	-	-	-	-
	(C ₃)	-	-	20	-	-	-	-	-	-	-
(D) Phosphoric acid ester		15	15	15	15	15	15	15	15	15	15
(E)	(E ₁)	-	-	-	-	-	-	-	-	20	-
	(E ₂)	-	-	-	-	-	-	-	-	-	20
Izod Impact Strength (1/8")		29	30	24	23	33	8	11	9	8	23
VST		95	95	95	96	93	95	96	89	98	93
Melt Flow Index		31	30	30	33	31	35	32	33	24	25
UL 94(1/10")		5V	5V	5V	5V	5V	5V	FAIL	5V	FAIL	FAIL
UL 94(1/12")		5V	5V	5V	5V	5V	FAIL	FAIL	FAIL	FAIL	FAIL
Average of overall combustion time (SEC, 1/10")		36	34	36	34	38	49	67	55	-	-
Appearance		90	90	88	94	90	95	60	70	86	89

As shown in the table 1, the resin composition of the present invention had good impact strength and appearance due to rubber modified polystyrene resin (C) Further, flame retardancy was also enhanced. Comparative Examples 1 ~ 5 not employing the component (C) showed much lower impact strength, appearance and flame retardancy in comparison with the Examples.

The present invention can be easily carried out by an ordinary skilled person in the art. Many modifications and changes may be deemed to be within the scope of the present invention as defined in the following claims.


What is claimed is:

1. A thermoplastic flame retardant resin composition comprising:
 - (A) about 40 to 95 parts by weight of a styrenic resin;
 - 5 (B) about 5 to 60 parts by weight of a polyphenylene ether;
 - (C) about 0.1 to 40 parts by weight of a rubber modified polystyrene resin containing about 40 to 65 % by weight of a rubber and about 0.1 to 8 % by weight of acrylonitrile in the polystyrene resin excluding rubber based on 100 parts by weight of the sum of (A) and (B); and
 - 10 (D) about 5 to 30 parts by weight of an aromatic phosphoric acid ester compound based on 100 parts by weight of the sum of (A) and (B).
2. The thermoplastic flame retardant resin composition as defined in claim 1, wherein said styrenic resin (A) is selected from the group consisting of
15 polystyrene resin, rubber modified polystyrene resin and a mixture thereof.
3. The thermoplastic flame retardant resin composition as defined in claim 2, wherein said styrenic resin (A) is polystyrene.
- 20 4. The thermoplastic flame retardant resin composition as defined in claim 2, wherein said styrenic resin (A) is a rubber modified polystyrene resin.
5. The thermoplastic flame retardant resin composition as defined in claim 1, wherein said rubber modified polystyrene resin (C) further comprises less than 40
25 parts by weight of a monomer selected from the group consisting of acrylic acid, methacrylate, maleic anhydride, and N-substituted maleimide, per 100 parts by weight of said rubber modified polystyrene resin.
6. The thermoplastic flame retardant resin composition as defined in claim 1,
30 wherein said rubber modified polystyrene resin (C) comprises 0.1 to 5 % by weight

of an acrylonitrile in the polystyrene resin excluding rubber.

7. The thermoplastic flame retardant resin composition as defined in claim 1, wherein said aromatic phosphoric acid ester (D) is represented by following formula

5 (I):

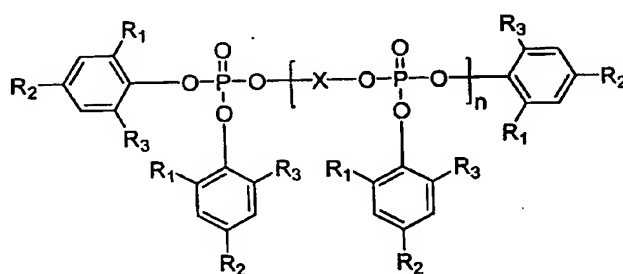

(I)

wherein R₁, R₂ and R₃ independently of one another are hydrogen or C₁₋₄ alkyl; X is a C₆₋₂₀ aryl group or alkyl-substituted C₆₋₂₀ aryl group that are derivatives from a dialcohol derivative such as resorcinol, hydroquinol, bisphenol-A and bisphenol-S; and n is 0~4.

8. The thermoplastic flame retardant resin composition as defined in claim 1, wherein said resin composition further comprises an anti-dripping agent, an impact modifier, an inorganic filler, a heat stabilizer, an anti-oxidants, a light stabilizer, a pigment, and/or dye.

```

mm  mm  pp ppp  eeee  rr rrr  sssss  oooo  nnnnn
mmmmmmmm pp  pp ee  ee  rrr rr ss  oo  oo  nn  nn
mmmmmmmm pp  pp eeeee  rr  rr  ssss  oo  oo  nn  nn
mm m mm  ppppp ee      rr      ss  oo  oo  nn  nn
mm      mm  pp      eeee  rrrr  sssss  oooo  nn  nn
      pppp

```

```

555555  777777  11
55      77  77  111
55555   77     11
      55     77  11
      55     77  11
55  55     77  11
  5555     77  111111

```

6/16/05